

QuSpot for Teltonika RUT951 POE+

Integrated multi-band LTE omni antennas + WiFi omni antennas + place to install Teltonika RUT951 PoE+ (All-in-one)

QuSpot for Teltonika RUT951 PoE+ router features integrated omni-directional LTE and Wi-Fi antennas, an internal mounting system for the router, and a bracket for pole or wall installation. To fully utilize the router's capabilities, it includes four RJ45 ports:

- 1x PoE IN 802.3af/at
- 3x PoE OUT 802.3af/at; 30W max per port; 90W total

It also comes equipped with a DC connector, supporting power input from a 9–57V DC source.

This all-in-one, versatile solution is ideal for a wide range of security applications. In addition to powering CCTV cameras, it can support various other PoE-enabled devices such as sensors, sirens, panic buttons, and more.

QuSpot simplifies advanced security deployments with a compact, integrated design.

4G
LTE**Wi Fi**
DUALBAND
2.4GHz
5GHz
694-2700MHz
6 dBi
OMNI
DIRECTIONAL
IP 68
-40° TO +80°

OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP68



ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



ALL **POE PORTS** SUPPORT



MADE IN **EUROPE**



LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
VSWR	<1.60, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
VSWR	< 1.50, max < 2.00
BEAMWIDTH	360°/25°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
POE IN	PoE In port 1 (LAN1): 802.3af/at compliant PD port
POE OUT	PoE Out ports 2-4 (LAN2, LAN3, WAN): 802.3af/at; 30W max per port; 90W total
INGRESS PROTECTION	IP68
DIMENSIONS	160 x 160 x 310 mm 6.3 x 6.3 x 12.20 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.5 - 0.7 Nm
MAST DIAMETER	25-66 mm 0.98-2.60 inch

FREQUENCY BANDS

LTE / 4G GSM

694 MHz	5	6	8	12	13	14	17	960 MHz
	18	19	20	26	27	28	29	
	44	67	68	85	n81	n82	n83	
	n89							

LTE / 4G UMTS

	1	2	3	4	9	10	25	
1710 MHz	33	34	35	36	37	39	59	2170 MHz
	62	n80	n84	n86	n95			

LTE / 4G WCS DARS


2300 MHz	30	40					2400 MHz
-------------	----	----	--	--	--	--	-------------

LTE / 4G


2400 MHz	7	38	41	53	69	n90	2700 MHz
-------------	---	----	----	----	----	-----	-------------

PLOTS


VSWR for Wi-Fi antenna

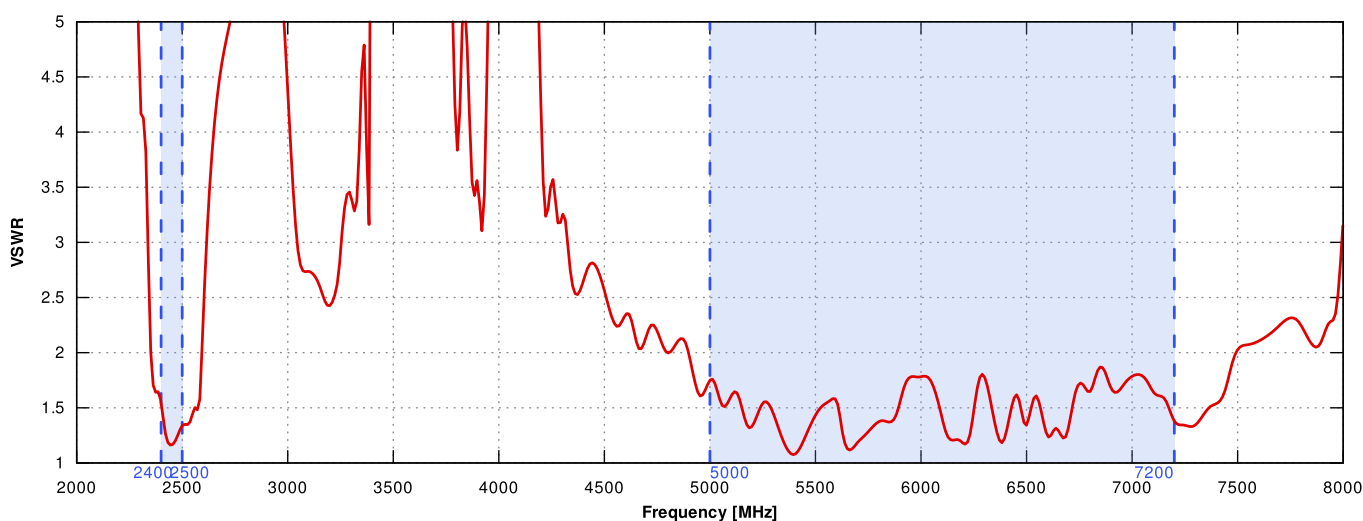


VSWSR for LTE antenna

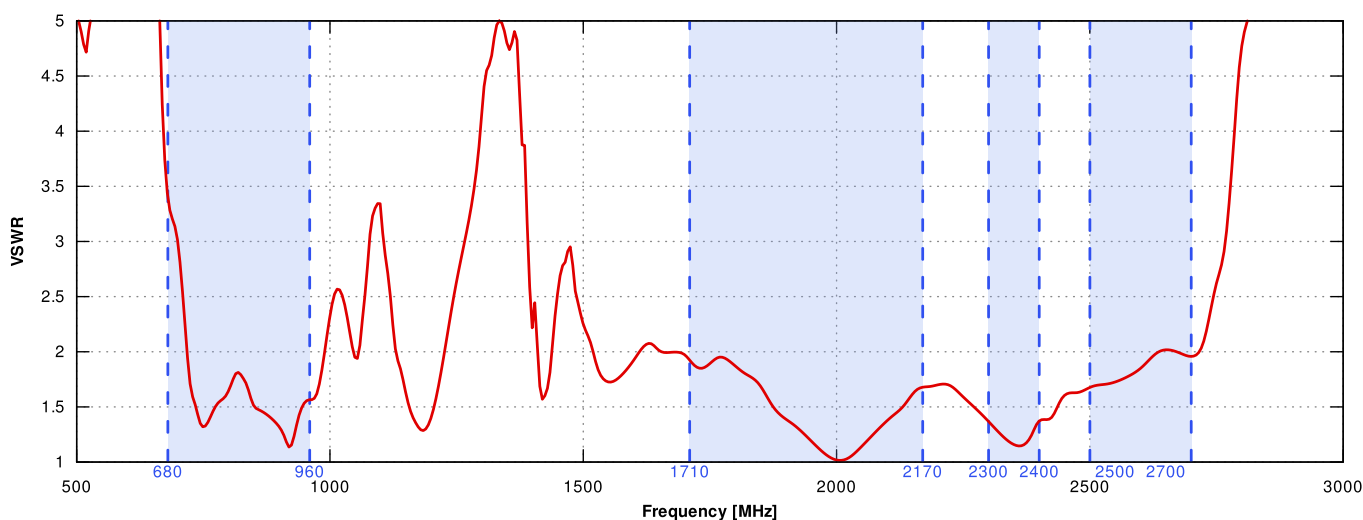



Gain for Wi-Fi antenna

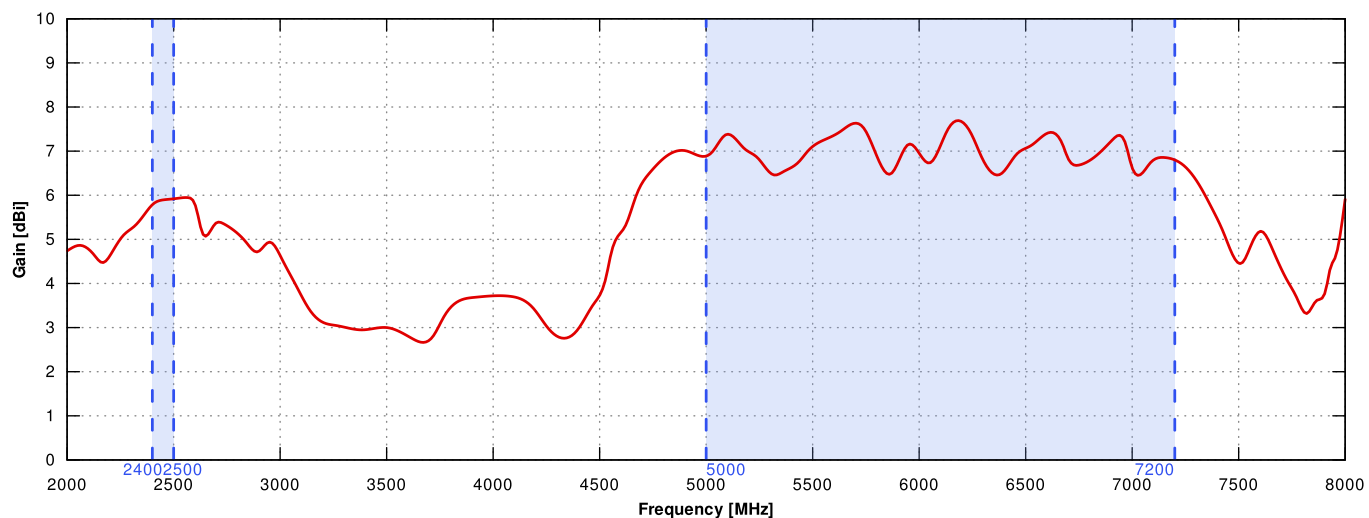



Gain for LTE antenna

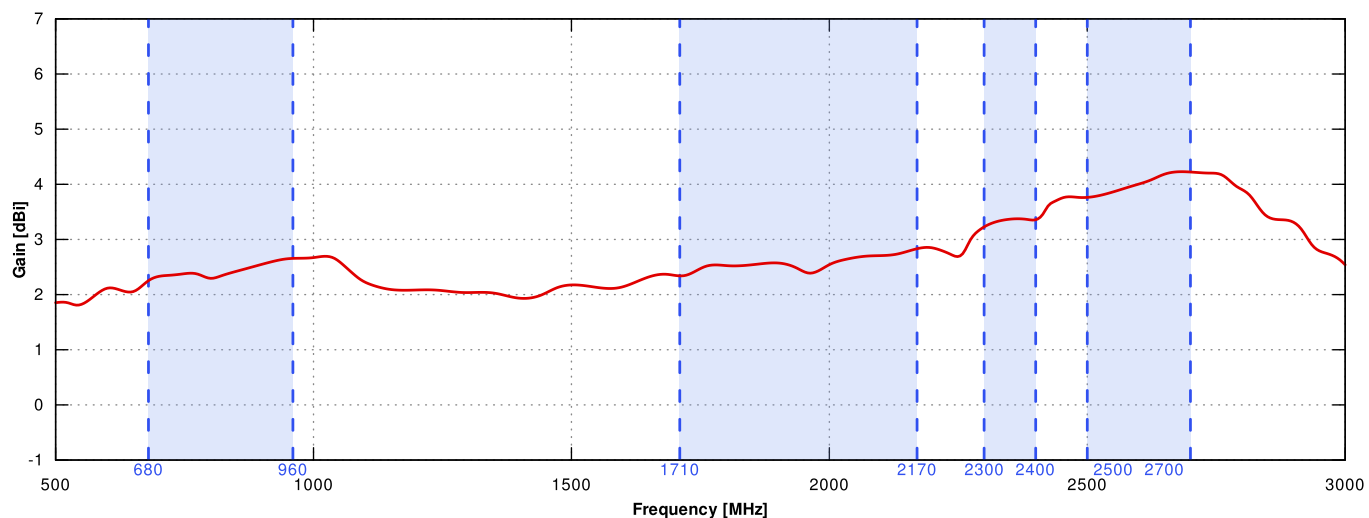



LTE from 700MHz to 900MHz

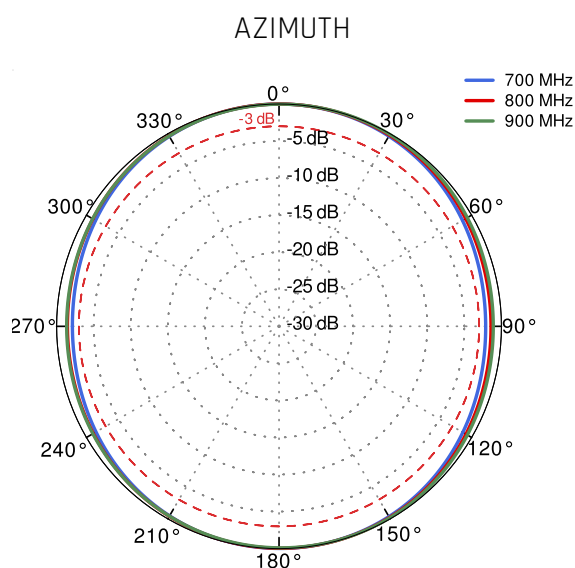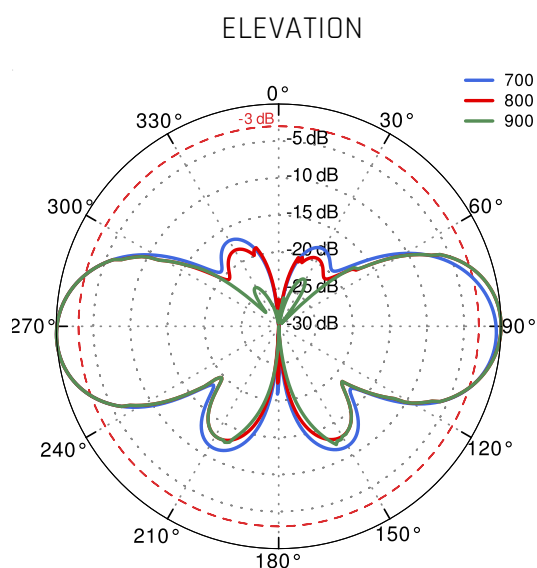



LTE from 1.71GHz to 2.17GHz

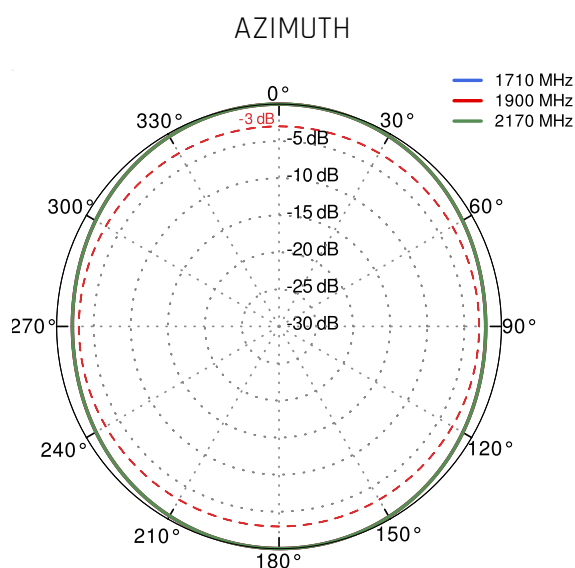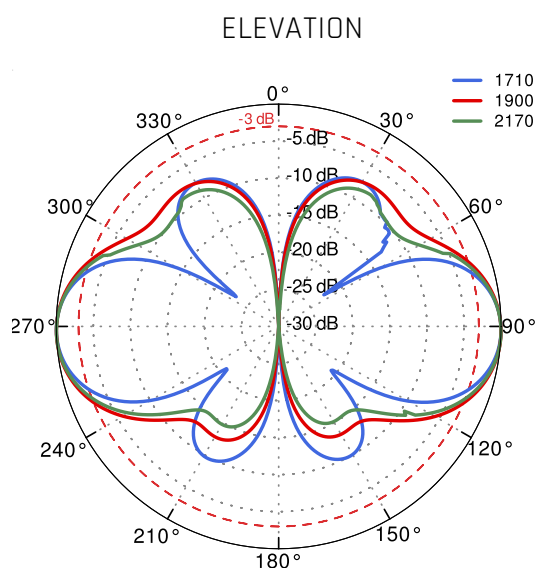

LTE from 2.3GHz to 2.7GHz

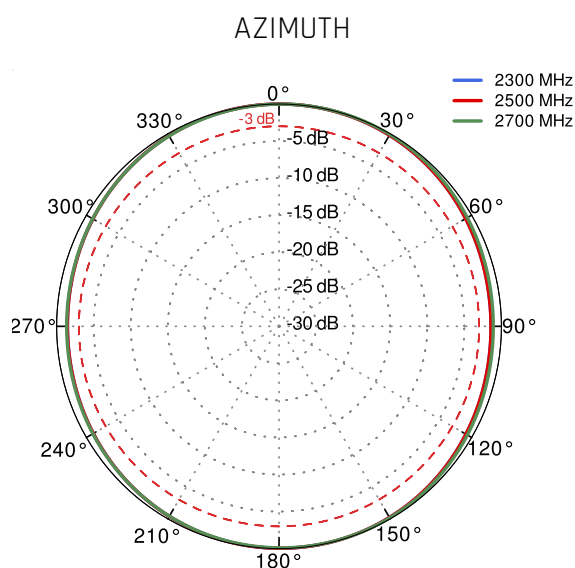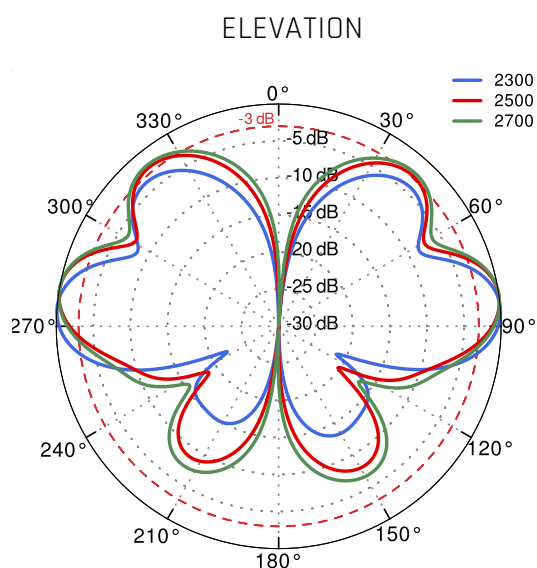

Wi-Fi 2.4GHz and 6.5GHz

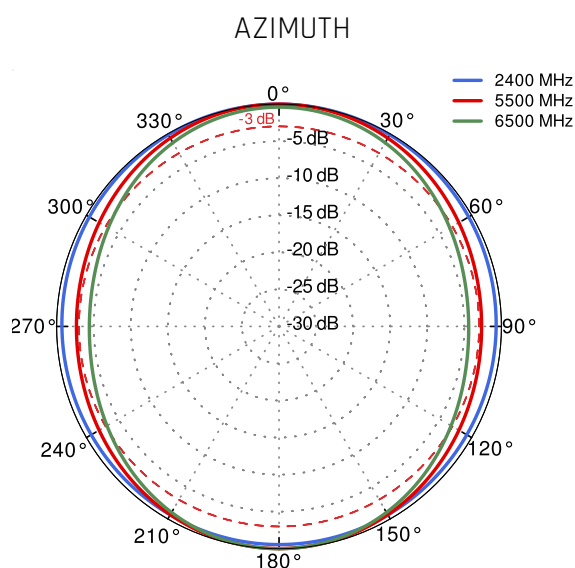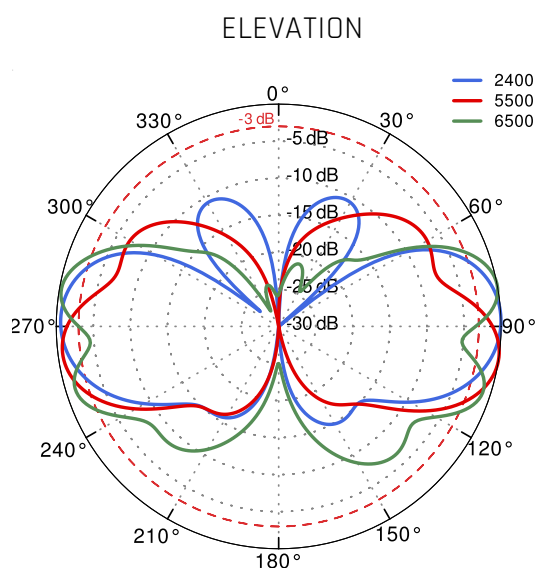

PORTS

