

RUTX09

INDUSTRIAL CELLULAR ROUTER



RUTX09 360° VIEW



4G LTE CAT 6

Cellular speeds up to 300Mbps with Carrier Aggregation

DUAL SIM

With auto failover, backup WAN and other switching scenarios

GNSS

Global Navigation Satellite System for location services and time synchronization

RMS

Compatible with Teltonika Remote Management System

GIGABIT ETH

4 x Gigabit Ethernet ports with up to 128 port/tag-based VLANs supported

SECURITY

Firewall and numerous VPN services including OpenVPN, IPsec, PPTP, L2TP & DMVPN

RUTX09

PRODUCT DESCRIPTION

// RUTX09 is LTE-A Cat 6 cellular IoT router with Dual-SIM, Carrier Aggregation, and 4 Gigabit Ethernet interfaces.

// RUTX09 is designed as a Main/Backup internet source offering cellular speeds up to 300 Mbps, where steady connection and high data throughput is necessary.

// It has plenty of processing capacity for custom applications on the OpenWrt based RutOS system.



// Plenty of security features are available, like Firewall, VPN, IPsec, SNMP, Content Filtering for maximized safety.

// This product is compatible with our Remote Management System for convenient monitoring, maintenance, and data collection.



FRONT VIEW

BACK VIEW

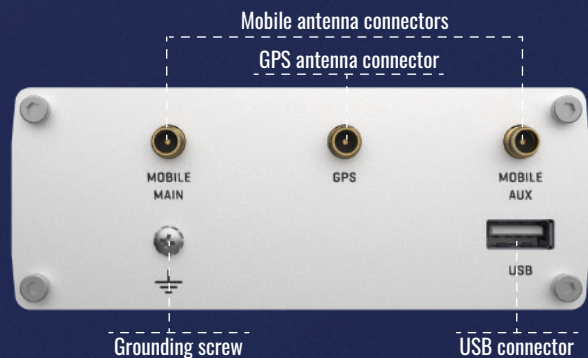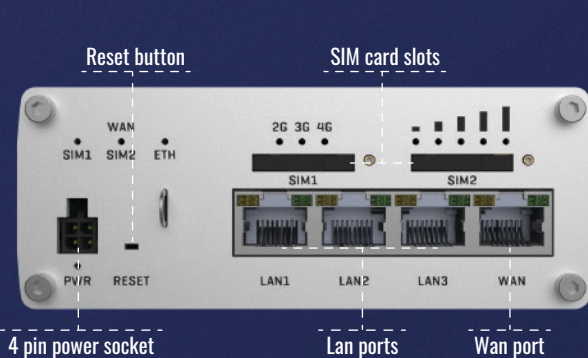

KEY FEATURES

HARDWARE

Mobile	4G/LTE (Cat 6), 3G
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Memory	256 MBytes Flash, 256 MBytes RAM
Powering option	4pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 1 x SMA for GPS
Ethernet	4 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	3 x WAN type, 2 x Connection type, 5 x Signal strength, 8 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	115 x 44 x 95 mm
Weight	455 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network protocols	TCP, UDP, IPv4, IPv6, ICMP, NTP, DNS, HTTP, HTTPS, FTP, SMTP, SSLv3, TLS 1.3, ARP, PPP, PPPoE, DHCP, Telnet
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Monitoring and management	WEB UI, CLI, SSH, SMS, TR-069, SNMP, JSON-RPC, MQTT, RMS
Cloud solutions	RMS, FOTA, Telenor, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
NTP	NTP Server, NTP Client, Sync with: External NTP server, GNSS, Mobile operator
GNSS	NMEA forwarding, AVL, Geofencing
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Network shares (Samba), Traffic Logging
Administration	Multi user, Configuration profiles, Diagnostics, logs, Configuration backup

RMS

RMS | REMOTE MANAGEMENT SYSTEM
COMPATIBLE WITH RUTX09
 MANAGEMENT | ALERTS | CONFIGURATION | ACCESS | FOTA



SOCIAL

